



# UltraTech VRLA Batteries

Valve Regulated Lead Acid





# UltraTech VRLA Batteries

## Valve Regulated Lead Acid

Valve Regulated Lead Acid Battery (VRLA) Maintenance-Free Rechargeable Sealed Lead Acid Battery, Absorbent Glass Mat (AGM) technology.

### Features & Benefits

- Maintenance-free, no water adding required
- Sealed Valve-Regulated
- Spill proof / leak proof
- Deep discharge protection
- Plate grids from lead-calcium alloy, free of antimony
- No corrosion
- Installs vertically or horizontally
- Low gassing (unless overcharged)
- Good cycling and stationary performance
- Good high rate discharges
- Long shelf life
- Rugged and vibration-resistant

### Applications

- General Purpose
- Alarm, CCTV & Security System
- Emergency Lighting
- Uninterruptable Power Supply (UPS)
- Electric Power Systems (EPS)
- Communication Power Supply
- Electronic Apparatus & Equipment
- DC Power Supply
- Auto Control System

### Specifications

#### Operating Temperature

Discharge: -15 ~ 50°C (5~120°F)  
 Charge: -0~ 40°C (5~104°F)  
 Storage: -15 ~ 40°C (5~104°F)

**Nominal Operating Temp** 25 ± 3°C (77 ± 5°F)

#### Cycle Use

14.4V ~ 15.0V at 25°C  
 (77°F) Temp. Coefficient -30mV/°C

#### Standby Use

13.5V ~ 13.8V at 25°C  
 (77°F) Temp. Coefficient -20mV/°C

#### Capacity affected by Temperature

40°C (104°F)	103%
25°C (77°F)	100%
0°C (32°F)	86%

#### Self Discharge

UltraTech series batteries may be stored for up to 6 months at 25°C (77°F) and then a freshening charge is required. For higher temperatures the time interval will be shorter.

#### ⚠ CAUTION

Do Not Short Circuit  
 Do Not charge in a sealed container  
 Do Not Disassemble  
 Do Not Heat above 50°C or Incinerate


#### ⚠ WARNING

Risk of fire, explosion or burns.  
 Not recommended for inverted use.  
 Follow product charging instructions.








MH45246

# VRLA Battery Construction

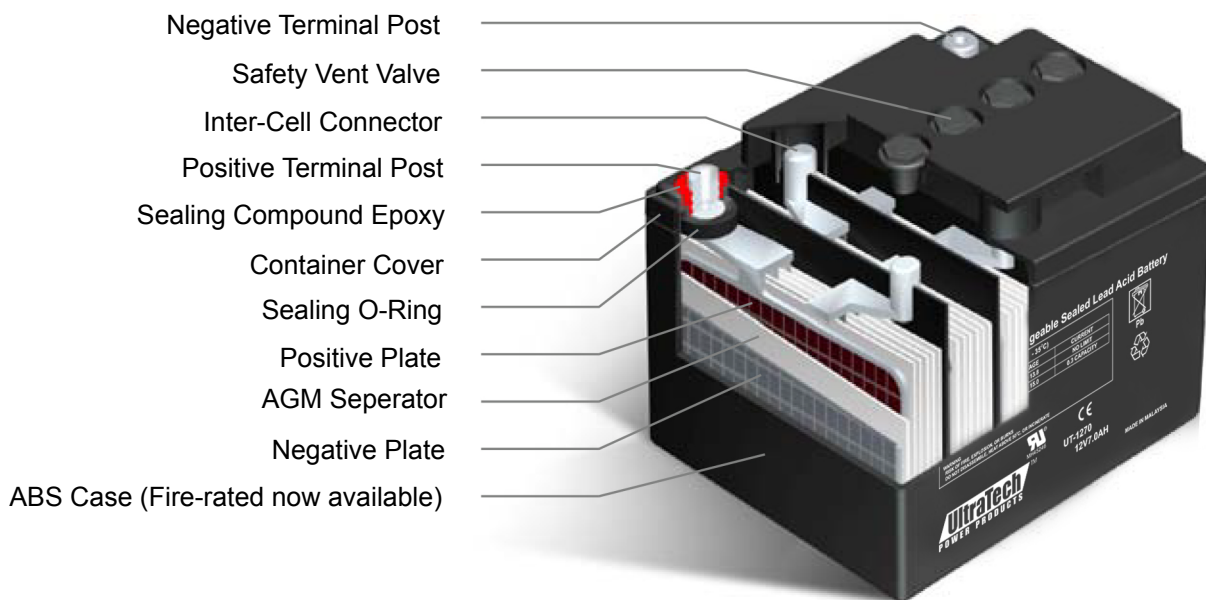


## Technical Features

- UltraTech Sealed Construction uses special compound epoxy, pressure-controlled vent valves and sealed technique to ensure no electrolyte leakage.
- Using oxygen recombination technology: maintenance-free PbCaSn alloy for plate grids: less gassing, less self-discharging
- High quality AGM separator: extend cycle life and prevent micro short circuit
- ABS material: increases the strength of the battery container.
- High purity raw material to ensures a low self discharge rate
- Silver-coated copper terminals, brass insert terminals and lead terminals improve the electric conductivity

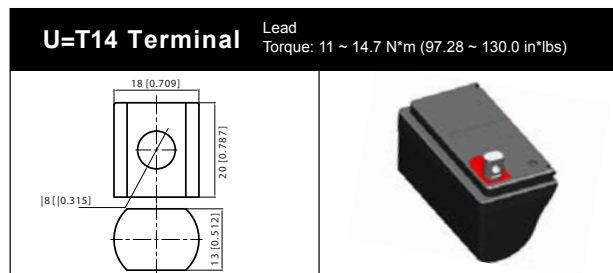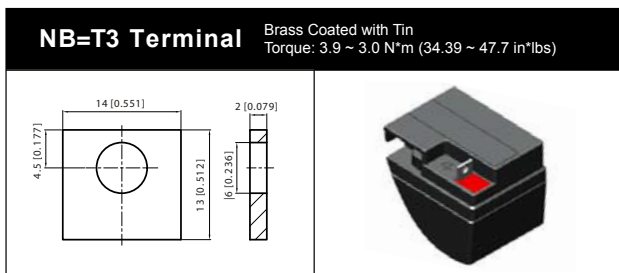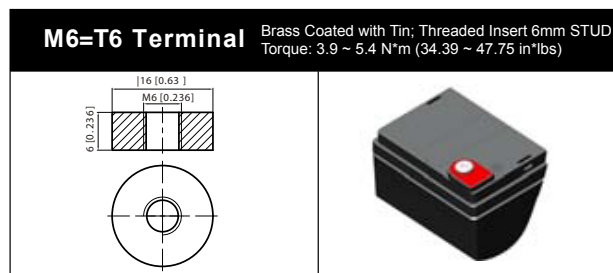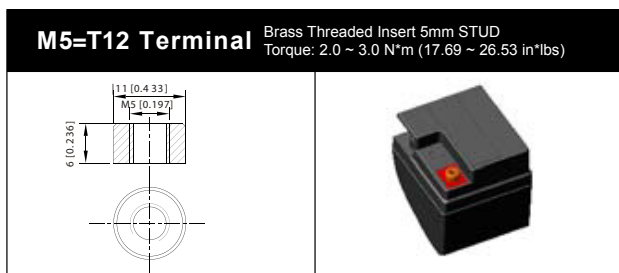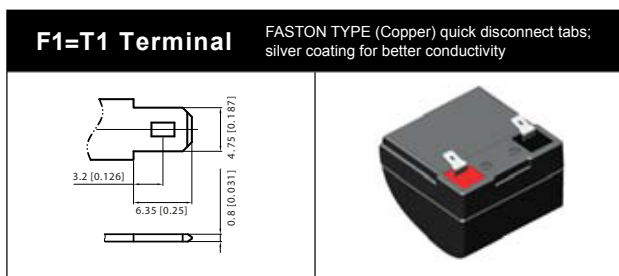

## General Characteristics

UT Part#	Terminal		Voltage	Capacity	Length		Width		Height		Total Height		Weight		Case Quantity	Gross Case
				(Ah) 20Hr	mm	in	mm	in	mm	in	mm	in	lbs	kg		Weight (kg)
UT-1213	T1	F1	12	1.3	97	3.8	43	1.7	52	2.0	58	2.3	1.26	0.57	20	11.4
UT-1220	T1	F1	12	2	178	7.0	35	1.4	60	2.4	66	2.6	2.14	0.97	20	19.2
UT-1221	T1	F1	12	2.1	178	7.0	35	1.4	60	2.4	66	2.6	2.14	0.97	20	19.4
UT-1232	T1	F1	12	3.2	134	5.3	67	2.6	59.5	2.3	65.5	2.6	2.62	1.19	10	11.9
UT-1240	T1	F1	12	4.5	90	3.5	70	2.8	101	4	107	4.2	3.20	1.45	10	14.5
UT-1270	T1	F1	12	7	151	5.9	65	2.6	93.5	3.7	99.5	3.9	3.99	1.81	5	9.1
UT-12120	T2	F2	12	12	151	5.9	98	3.9	95	3.7	101	4.0	7.14	3.24	4	14
UT-12180	T2	F2	12	18	181.5	7.1	76.5	3.0	167.5	6.6	167.5	6.6	11.79	5.35	1	5.4
UT-121805	T12	M5	12	18	181.5	7.1	76.5	3.0	167.5	6.6	168	6.6	11.79	5.35	1	5.4
UT-12240	T3	NB	12	24	166	6.5	175	6.9	125	4.9	125	4.9	15.87	7.2	1	7.2
UT-12260NB	T3	NB	12	24	166	6.5	175	6.9	125	4.9	125	4.9	17.20	7.8	1	7.8
UT-12380	T6	M6	12	40	197	7.8	165	6.5	170	6.7	170	6.7	26.0	12.0	1	12.2
UT-12650	T6	M6	12	65	348	13.7	167	6.6	178	7.0	178	7.0	40.90	18.5	1	18.5

Fire-Rated ABS Versions (UL94V-0) 																
UT Part#	Terminal		Voltage	Capacity	Length		Width		Height		Total Height		Weight		Case Quantity	Gross Case
				(Ah) 20Hr	mm	in	mm	in	mm	in	mm	in	lbs	kg		Weight (kg)
UT-1220-FR	T1	F1	12	2	178	7.0	35	1.4	60	2.4	66	2.6	2.14	0.97	20	19.4
UT-1232-FR	T1	F1	12	3.2	134	5.3	67	2.6	59.5	2.3	65.5	2.60	2.62	1.19	10	11.9
UT-1270-FR	T1	F1	12	7	151	5.9	65	2.6	93.5	3.7	99.5	3.9	3.99	1.81	5	9.05
UT-12120-FR	T2	F2	12	12	151	5.9	98	3.9	95	3.7	101	4.0	7.14	3.24	4	12.96
UT-121805-FR	T12	M5	12	18	181.5	7.1	76.5	3.0	167.5	6.6	167.5	6.6	11.79	5.35	1	5.35

## Performance Characteristics


UT Part#	Voltage	Amp Hour Rate Capacity at 25					Maximum Discharge(A)	Internal Resistance	Case Material
		20Hr 1.80 VPC	10Hr 1.80 VPC	5Hr 1.75 VPC	3Hr 1.75 VPC	1Hr 1.75 VPC			
UT-1213	12	1.3	1.1	1	0.9	0.8	18A (5s)	~90mΩ	ABS
UT-1220	12	2	2.1	1.9	1.7	1.4	33A (5s)	~100mΩ	ABS
UT-1221	12	2.1	1.97	1.81	1.61	1.25	31.5A (5s)	~75mΩ	ABS
UT-1232	12	3.2	3.31	3.01	2.62	2.03	53A (5s)	~40mΩ	ABS
UT-1240	12	4.5	3.7	3.4	3.1	2.5	60A (5s)	~40mΩ	ABS
UT-1270	12	7	6.5	6	5.4	4.4	105A (5s)	~23mΩ	ABS
UT-12120	12	12	11.2	10.2	9.2	7.5	180A (5s)	~17mΩ	ABS
UT-12180	12	18	16.7	15.3	13.8	11.3	270A (5s)	~16mΩ	ABS
UT-121805	12	18	16.7	15.3	13.8	11.3	270A (5s)	~16mΩ	ABS
UT-12240	12	24	22.3	20.4	18.4	15.1	360A (5s)	~14mΩ	ABS
UT-12260NB	12	26	24.2	22.1	19.9	16.3	390A (5s)	~14mΩ	ABS
UT-12380	12	40	38	32.7	29.7	23.2	456A (5s)	~10mΩ	ABS
UT-12650	12	65	59.8	53	47.7	35.9	650A (5s)	~7.4mΩ	ABS

### Fire-Rated ABS Versions (UL94V-0)




UT Part#	Voltage	Amp Hour Rate Capacity at 25					Maximum Discharge(A)	Internal Resistance	Case Material
		20Hr 1.80 VPC	10Hr 1.80 VPC	5Hr 1.75 VPC	3Hr 1.75 VPC	1Hr 1.75 VPC			
UT-1220-FR	12	2	1.95	1.78	1.58	1.22	31.5A (5s)	~75mΩ	ABS
UT-1232-FR	12	3.2	3.31	3.01	2.62	2.03	53A (5s)	~40mΩ	ABS
UT-1270-FR	12	7	6.53	5.85	5.3	4.06	105A (5s)	~27mΩ	ABS
UT-12120-FR	12	12	11.2	10.2	9	6.84	180A (5s)	~19mΩ	ABS
UT-121805-FR	12	18	17	15.5	13.8	11.2	270A (5s)	~16mΩ	ABS


## Discharge Characteristics

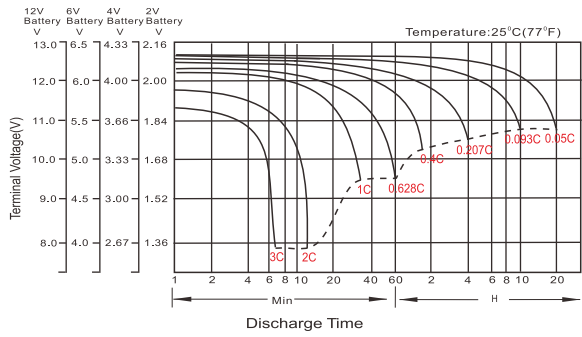


## Float Charging Characteristics

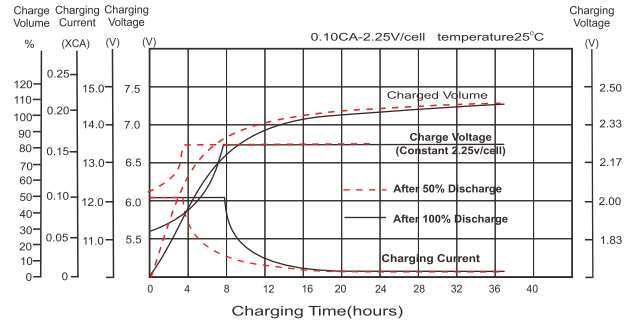


## Temperature Effects vs Battery Capacity

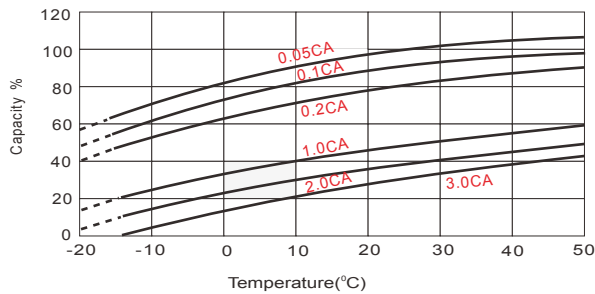


## Effect of Temperature on Long-Term Float Life

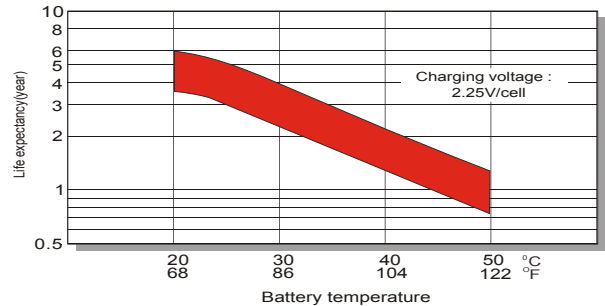

## Cycle Life vs Depth of Discharge

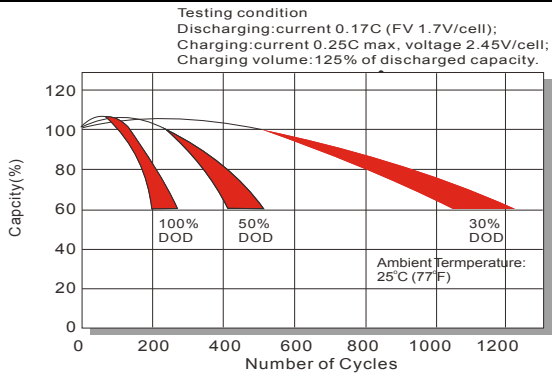

## Self Discharge Characteristics

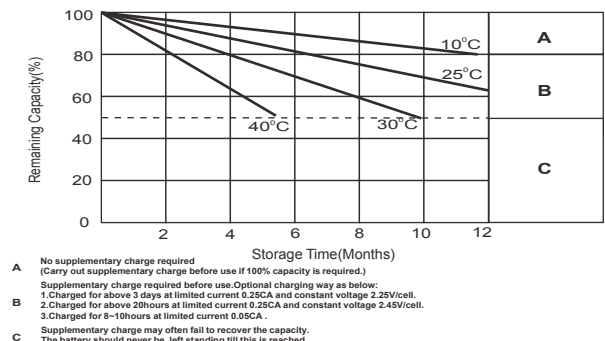

### ADI Global Distribution - UK

Unit 6, Broadgate, Oldham  
 Broadway Business Park,  
 Oldham, OL9 9XA.  
 Sales Office: 0161 687 8787

### ADI Global Distribution - Ireland

Unit 8, Westlink Business Park,  
 Kylemore Road, Ballyfermot,  
 Dublin, 10 KP94  
 Sales Office: 01 450 1366

### Technical Support:

UK: +44 (0) 161 687 8789  
 Ireland: +44 (0) 161 687 8789